



¹. V. Seetamaha LAKSHMI, ². G.V. Ramana REDDY, ³. B.D.C.N. PRASAD

CHEMICAL REACTION EFFECTS ON MHD MIXED CONVECTIVE FLOW FROM A VERTICAL SURFACE WITH OHMIC HEATING AND VISCOUS DISSIPATION

^{1,3}. P.V.P. Siddartha Institute of Technology, Vijayawada, A.P (India)–521007, INDIA
². Department of Mathematics, KL University, Vaddeswarsam, A.P–522502, INDIA

Abstract: The paper investigated the effect of chemical reaction on unsteady MHD mixed convection flow past an infinite vertical plate with Ohmic heating and viscous dissipation has been discussed. Approximate solutions have been derived for the velocity, temperature field, concentration profiles, skin friction and Nusselt number using multi-parameter perturbation technique. The obtained results are discussed with the help of the graphs to observe the effect of various parameters like Schmidt number (Sc), Prandtl number (Pr), Magnetic parameter (M), radiation parameter (F) and porosity parameter (K).
Keywords: mass transfer, radiation, MHD, concentration and skin-friction

1. INTRODUCTION

The hydromagnetic convection with heat and mass transfer in porous medium has been studied due to its importance in the design of MHD generators and accelerators in geophysics, in design of under ground water energy storage system, soil-sciences, astrophysics, nuclear power reactors and so on. Magnetohydrodynamics is currently undergoing a period of great enlargement and differentiation of subject matter. The interest in these new problems generates from their importance in liquid metals, electrolytes and ionized gases. Because of their varied importance, these flow have been studied by several authors—notable amongst them are Shercliff [1], Ferraro and Plumpton [2] and Crammer and Pai [3]. Elbashbeshy [4] studied heat and mass transfer along a vertical plate in the presence of magnetic field. Hossain and Rees [5] examined the effects of combined buoyancy forces from thermal and mass diffusion by natural convection flow from a vertical wavy surface. Combined heat and mass transfer in MHD free convection from a vertical surface has been studied by Chein [6]. Further, the effect of Hall current on the fluid flow with variable concentration has many applications in MHD power generation, in several astrophysical and meteorological studies as well as in plasma flow through MHD power generators. From the point of application, model studies on the Hall Effect on free and forced convection flows have been made by several investigators. Aboeldahab [7], Datta et al. [8], Acharya et al.[9] and Biswal et al.[10] have studied the Hall effect on the MHD free and forced convection heat and mass transfer over a vertical surface. Hossain and Alim [11] studied the radiation effect on free and forced convection flows past a vertical plate, including various physical aspects. Aboeldhab [12] studied the radiation effect in heat transfer in an electrically conducting fluid at stretching surface. A.Y. Ghaly and E.M.E. Elbarbary, [13], were examined by radiation effect on MHD free convection flow of a gas at a stretching surface with uniform free stream. Heat and mass transfer effects on moving plate in the presence of thermal radiation have been studied by Muthukumaraswamy [14] using Laplace technique. For the problem of coupled heat and mass transfer in MHD free convection, the effect of both viscous dissipation and Ohmic heating are not studied in the above

investigations. However, it is more realistic to include these two effects to explore the impact of the magnetic field on the thermal transport in the boundary layer. With this awareness, the effect of Ohmic heating on the MHD free convection heat transfer has been examined for a Newtonian fluid by Hossain [15]. Chen [16] studied the problem of combined heat and mass transfer of an electrically conducting fluid in MHD natural convection, adjacent to a vertical surface with Ohmic heating. Ganesan and Palani [17] obtained numerical solution of Unsteady MHD flow past a semi-infinite isothermal vertical plate. Ganesan and Palani [18] studied numerical solution of transient free convection MHD flow of an incompressible viscous fluid flow past a semi-infinite inclined plate with variable surface heat and mass flux. The set of governing equations are solved by using an implicit finite difference scheme. Orhan Aydin and Ahmet Kaya [19] investigates mixed convection heat transfer about a permeable vertical plate in the presence of magneto and thermal radiation effects, The set of governing equations of the problem are solved using similarity variables. The problem of steady laminar magneto hydrodynamic(MHD) mixed convection heat transfer about a vertical plate is solved numerically by Orhan Aydin and Ahmet Kaya [20] taking into account the effect of ohmic heating and viscous dissipation.

The propagation of thermal energy through mercury and electrolytic solution in the presence of magnetic field and radiation has wide range of applications. Hence, our object in the present paper is to study the effect of radiation on heat and mass transfer in mercury ($Pr = 0.025$) and electrolytic solution ($Pr = 1.0$) past an infinite porous hot vertical plate in the presence of Ohmic heating and transverse magnetic field.

2. FORMATION OF THE PROBLEM

We consider the mixed convection flow of an incompressible and electrically conducting viscous fluid such that x^* - axis is taken along the plate in upwards direction and y^* - axis is normal to it. A transverse constant magnetic field is applied that is in the direction of y^* - axis. Since the motion is two dimensional and length of the plate is large therefore all the physical variables are independent of x^* . Let u^* and v^* be the components of velocity in x^* and y^* directions respectively, taken along and perpendicular to the plate. The governing equations of continuity, momentum, energy and mass diffusion for a flow of an electrically conducting fluid along a hot, non-conducting porous vertical plate in the presence of concentration and radiation is given by

$$\frac{\partial v^*}{\partial y^*} = 0 \Rightarrow v^* = -v_0 \text{ (constant)} \quad (1)$$

$$\frac{\partial p^*}{\partial y^*} = 0 \Rightarrow p^* \text{ is independent of } y^* \quad (2)$$

$$\rho v^* \frac{\partial u^*}{\partial y^*} = \mu \frac{\partial^2 u^*}{\partial y^{*2}} + \rho g \beta (T^* - T_\infty) + \rho g \beta^* (C^* - C_\infty) - \sigma B_0^2 u^* - \frac{\nu}{K^*} u^* \quad (3)$$

$$\rho C_p v^* \frac{\partial T^*}{\partial y^*} = \kappa \frac{\partial^2 T^*}{\partial y^{*2}} + \mu \left(\frac{\partial u^*}{\partial y^*} \right)^2 - \frac{\partial q_r^*}{\partial y^*} + \sigma B_0^2 u^{*2} \quad (4)$$

$$v^* \frac{\partial C^*}{\partial y^*} = D \frac{\partial^2 C^*}{\partial y^{*2}} - K_r^* C^* \quad (5)$$

where: g - due to gravity, T^* - temperature of the fluid near the plate, T_∞ - free stream temperature, C^* - concentration, β - coefficient of thermal expansion, κ - thermal conductivity, p^* - pressure, c_p - specific heat of constant pressure, B_0 - magnetic field coefficient, μ - viscosity of the fluid, q_r^* - radiative heat flux, ρ - density, σ - magnetic permeability of the fluid, v_0 - constant suction velocity, ν - kinematic viscosity, D - molecular diffusivity, and K_r^* - chemical reaction parameter.

The radiative heat flux is given by [21]

$$\frac{\partial q_r^*}{\partial y^*} = 4(T^* - T_\infty)I' \quad (6)$$

where $I' = \int_0^\infty K \frac{\partial e_{b\lambda}}{\partial T^*} d\lambda$, $K\lambda_w$ is the absorption coefficient at wall and $e_{b\lambda}$ is Planck's function.

The boundary conditions are

$$\begin{aligned} u^* = 0, T^* = T_w, C^* = C_w, y^* = 0 \\ u^* \rightarrow 0, T^* \rightarrow T_\infty, C^* \rightarrow C_\infty, y^* \rightarrow \infty \end{aligned} \quad (7)$$

Introducing the following non-dimensional quantities are

$$\begin{aligned} y = \frac{v_0 y^*}{\nu}, u = \frac{u^*}{v_0}, T = \frac{T^* - T_\infty}{T_w - T_\infty}, C = \frac{C^* - C_\infty}{C_w - C_\infty}, \text{Pr} = \frac{\mu C_p}{\kappa}, Gr = \frac{\rho g \beta \nu (T_w - T_\infty)}{v_0^3}, F = \frac{4\nu I'}{\rho C_p v_0^2}, \\ Gm = \frac{\rho g \beta^* \nu (C_w - C_\infty)}{v_0^3}, Sc = \frac{\nu}{D}, K_r = \frac{K_r^* \nu}{v_0^2}, M = \frac{\sigma B_0^2 \nu}{\rho v_0^2}, K = \frac{K^* v_0^2}{\nu}, E = \frac{v_0^2}{C_p (T_w - T_\infty)} \end{aligned} \quad (8)$$

In the equations (3), (4), (5) and (7), we get

$$\frac{\partial^2 u}{\partial y^2} + \frac{\partial u}{\partial y} - (M + 1/K)u = -[GrT + GmC] \quad (9)$$

$$\frac{\partial^2 T}{\partial y^2} + \text{Pr} \frac{\partial T}{\partial y} - F \text{Pr} T + \text{Pr} E \left(\frac{\partial u}{\partial y} \right)^2 + \text{Pr} E M u^2 = 0 \quad (10)$$

$$\frac{\partial^2 C}{\partial y^2} + Sc \frac{\partial C}{\partial y} + K_r Sc C = 0 \quad (11)$$

where: Gr – Grashof number, Gm – modified Grashof number, Pr – Prandtl number, F – the radiation parameter, Sc – the Schmidt number, E – Eckert number, M – magnetic parameter.

The corresponding boundary conditions in dimensionless form are reduced to

$$\begin{aligned} u = 0, T = 1, C = 1, y = 0 \\ u \rightarrow 0, T \rightarrow 0, C \rightarrow 0, y \rightarrow \infty \end{aligned} \quad (12)$$

The physical variable u, T and C can expand in the power of Eckert number (E). This can be possible physically as E for the flow of an incompressible fluid is always less than unity. It can be interpreted physically as the due to the Joules dissipation is super imposed on the main flow.

Solution of the problem

To reduce the above system of partial differential equations to a system of ordinary differential equations in a dimensionless form, we may represent the translational velocity, temperature and concentration as

$$\begin{aligned} u(y) = u_0(y) + E u_1(y) + o(E^2) \\ T(y) = T_0(y) + E T_1(y) + o(E^2) \\ C(y) = C_0(y) + E C_1(y) + o(E^2) \end{aligned} \quad (13)$$

Using equation (13) in equation (9)–(11) and equating the coefficient of like power of E, we have

$$u_0'' + u_0' - (M + 1/K)u_0 = -GrT_0 - GmC_0 \quad (14)$$

$$T_0'' + \text{Pr} T_0' - F \text{Pr} T_0 = 0 \quad (15)$$

$$C_0'' + Sc C_0' + K_r Sc C_0 = 0 \quad (16)$$

$$u_1'' + u_1' - (M + 1/K)u_1 = -GrT_1 - GmC_1 \quad (17)$$

$$T_1'' + \text{Pr} T_1' - F \text{Pr} T_1 + \text{Pr} u_0'^2 + M u_0^2 = 0 \quad (18)$$

$$C_1'' + Sc C_1' + K_r Sc C_1 = 0 \quad (19)$$

The corresponding boundary conditions are

$$\begin{aligned} u_0 = 0, u_1 = 0, T_0 = 1, T_1 = 0, C_0 = 1, C_1 = 0 \quad \text{at } y = 0 \\ u_0 \rightarrow 0, u_1 \rightarrow 0, T_0 \rightarrow 0, T_1 \rightarrow 0, C_0 \rightarrow 0, C_1 \rightarrow 0 \quad \text{as } y \rightarrow \infty \end{aligned} \quad (20)$$

Solving equations (14)–(19) with the help of (20), we get

$$u_0(y) = m_6(e^{-m_4y} - e^{-Scy}) + m_5(e^{-m_4y} - e^{-m_1y})$$

$$T_0(y) = e^{-m_1y}, \quad C_0(y) = e^{-Scy}$$

$$u_1(y) = D_{17}e^{-m_9y} - D_{10}e^{-m_1y} + D_{11}e^{-2m_1y} + D_{12}e^{-2m_4y} - D_{13}e^{-m_4y} + D_{14}e^{-2Scy} - D_{15}e^{-D_1y} + D_{16}e^{-D_2y}$$

$$T_1(y) = D_9e^{-m_1y} - D_3e^{-2m_1y} - D_4e^{-2m_4y} + D_5e^{-m_{10}y} - D_6e^{-2Scy} + D_7e^{-D_1y} - D_8e^{-D_2y}$$

The skin-friction, Nusselt number and Sherwood number are important physical parameters for this type of boundary layer flow.

Knowing the velocity field, the skin-friction at the plate can be obtained, which in non-dimensional form is given by

$$\tau = \left(\frac{\partial u}{\partial y} \right)_{y=0} = m_6(Sc - m_4) + m_5(m_1 - m_4) - E \begin{pmatrix} m_4D_7 - m_1D_{10} + 2m_1D_{11} + 2m_4D_{12} \\ -m_4D_{13} + 2ScD_{14} - D_1D_{15} + D_2D_{16} \end{pmatrix}$$

Knowing the temperature field, the rate of heat transfer coefficient can be obtained, which in non-dimensional form, in terms of Nusselt number, is given by

$$Nu = - \left(\frac{\partial T}{\partial y} \right)_{y=0} = m_1 + E(m_1D_9 - 2m_1D_3 - 2m_4D_4 + m_{10}D_5 - 2ScD_6 + D_1D_7 - D_2D_8)$$

where:

$$m_1 = \left[\text{Pr} + \sqrt{\text{Pr}^2 + 4F \text{Pr}} \right] / 2, \quad m_2 = - \left[\text{Pr} + \sqrt{\text{Pr}^2 + 4F \text{Pr}} \right] / 2, \quad m_3 = \left[-1 + \sqrt{1 + 4(M + 1/K)} \right] / 2, \quad m_4 = \left[1 + \sqrt{1 + 4(M + 1/K)} \right] / 2,$$

$$m_5 = Gr / (m_1 - m_4)(m_1 + m_3), \quad m_6 = Gr / (m_1 - m_4)(m_1 + m_3), \quad m_7 = Gm / (Sc^2 - Sc - (M + 1/K)^2),$$

$$m_8 = \text{Pr} m_5^2 m_1^2, \quad m_9 = \text{Pr} m_5^2 m_1^2, \quad m_{10} = m_1 + m_4, \quad D_1 = m_4 + Sc; D_2 = m_1 + Sc,$$

$$D_3 = \text{Pr} m_5^2 (m_1^2 + (M + 1/K)^2) / m_1 (2m_1 + m_3), \quad D_4 = \text{Pr} (m_4^2 + (M + 1/K)^2) (m_5 + m_6)^2 / 2(m_4 - m_1)(2m_4 + m_2),$$

$$D_5 = \left[2 \text{Pr} (M + 1/K)^2 (m_5 + m_6) (m_1 m_4 + (M + 1/K)^2) \right] / (m_{10} - m_1)(m_{10} - m_3), \quad D_8 = 2 \text{Pr} m_5 m_6 [m_1 Sc + (M + 1/K)^2]^2,$$

$$D_6 = \text{Pr} m_6^2 (Sc^2 + (M + 1/K)^2) / (4Sc^2 - 2Sc \text{Pr} - F \text{Pr}), \quad D_7 = 2 \text{Pr} m_6 (m_5 + m_6) [m_4 Sc + (M + 1/K)^2] / [D_1^2 - \text{Pr} D_1 - F \text{Pr}],$$

$$D_9 = D_3 + D_4 - D_5 + D_6 - D_7 + D_8, \quad D_{10} = Gr D_9 / (m_1 - m_4)(m_1 + m_3), \quad D_{11} = Gr D_3 / (2m_1 - m_4)(2m_1 + m_3),$$

$$D_{12} = Gr D_4 / m_4 (2m_4 + m_3), \quad D_{13} = Gr D_5 / (m_{10} - m_4)(m_{10} + m_2), \quad D_{14} = Gr D_6 / [4Sc^2 - 2Sc - (M + 1/K)^2],$$

$$D_{15} = Gr D_7 / [D_1^2 - D_1 - (M + 1/K)^2], \quad D_{16} = Gr D_8 / [D_2^2 - D_2 - (M + 1/K)^2], \quad D_{17} = D_{10} - D_{11} - D_{12} + D_{13} - D_{14} + D_{15} - D_{16}$$

3. RESULTS AND DISCUSSION

In order to get a physical insight in to the problem the effects of various governing parameters on the physical quantities are computed and represented in Figures 1–16 and discussed in detail.

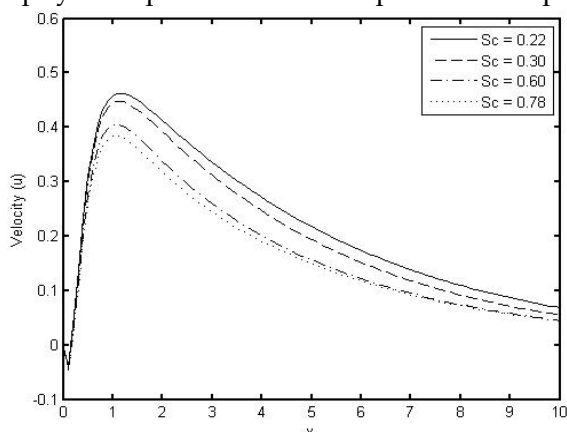


Figure 1. Effects of Schmidt number on the velocity profiles.

($\epsilon=0.001, \text{Pr}=0.025, M=2, Gr=5, Gm=2, K=1, F=3$)

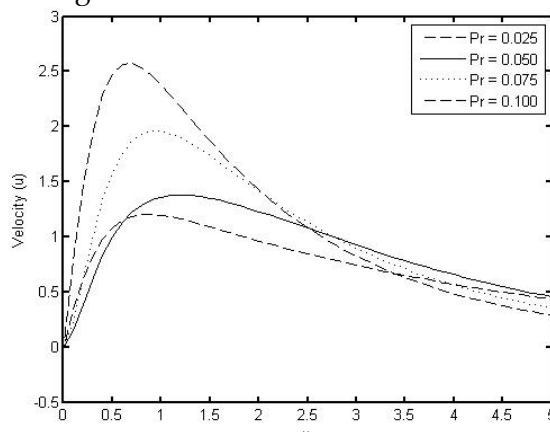


Figure 2. Effects of Prandtl number on velocity profiles.

($\epsilon=0.001, Sc=0.22, M=2, Gr=5, Gm=2, K=1, F=3$)

Figure 1 illustrates the effect of Schmidt number on the velocity field. It is noticed that as the Schmidt number increases the velocity field decreases. The effect of Prandtl number on the velocity field has been illustrated in Figure 2. It is observed that as the Prandtl number increases

the velocity field increases. Figure 3 illustrates the effect of Grashof number on the velocity field. It is noticed that as the Grashof number increases the velocity field increases. Figure 4 illustrates the effect of magnetic field on the velocity profiles. When the applied magnetic field intensity increases, there seems to be a decrease in the velocity field. The effect of modified Grashof number on the velocity field has been illustrated in Figure 5. It is observed that as the modified Grashof number increases the velocity field increases. The effect of thermal radiation parameter on the velocity field has been illustrated in Figure 6. It is seen that as the thermal radiation parameter increases the velocity field increases. The effect of porosity parameter on the velocity field is shown in Figure 7. It is observed that as the porosity parameter increases the velocity field increases.

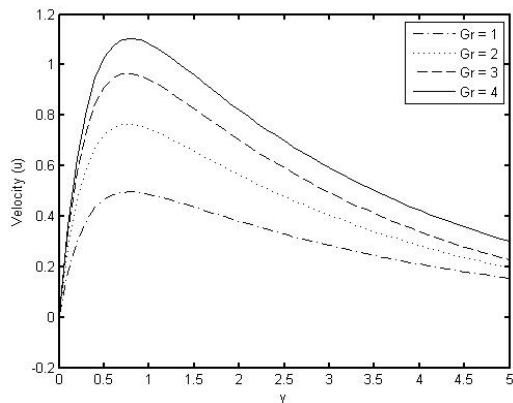


Figure 3. Effects of Grashof number on velocity profiles.

($\epsilon=0.001, Pr=0.025, M=2, F=3, Gm=2, Sc=0.22, K=1$)

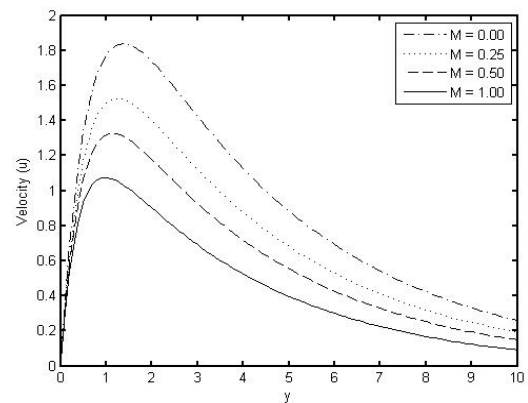


Figure 4. Effects of magnetic parameter on velocity profiles.

($\epsilon=0.001, Pr=0.025, Gm=2, Gr=2, F=3, Sc=0.22, K=1$)

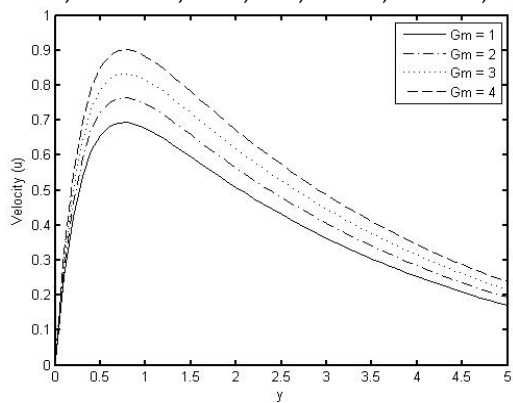


Figure 5. Effects of modified Grashof number on velocity profiles.

($\epsilon=0.001, Pr=0.025, M=2, Gr=2, F=3, Sc=0.22, K=1$)

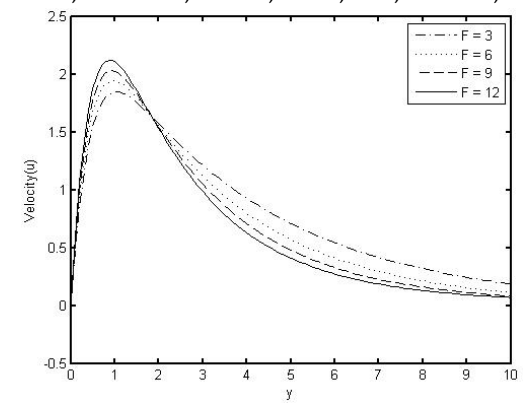


Figure 6. Effects of radiation parameter on velocity profiles.

($\epsilon=0.001, Pr=0.025, M=2, Gr=5, Gm=2, Sc=0.22, K=1$)

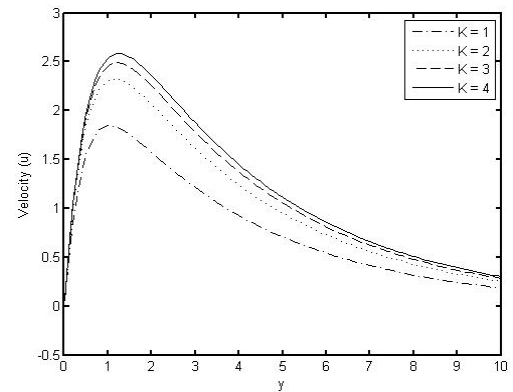


Figure 7. Effects of porosity parameter on velocity profiles.

($\epsilon=0.001, Pr=0.025, M=2, Gr=5, Gm=2, Sc=0.22, F=3$)

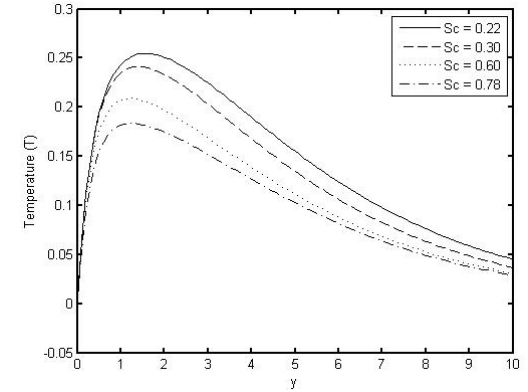


Figure 8. Effects of Schmidt number on temperature profiles.

($\epsilon=0.001, Pr=0.025, M=0.5, Gr=2, Gm=2, K=1, F=3$)

Figure 8 illustrates the effect of Schmidt number on the temperature field. It is noticed that as the Schmidt number increases the temperature field decreases. The effect of Prandtl number on the

temperature field is shown in Figure 9. It is observed that, an increase in the Prandtl number contributes to an increase in the temperature. The effect of magnetic field intensity on the temperature field is illustrated in Figure 10. It is observed that as the magnetic field increases, the temperature increases.

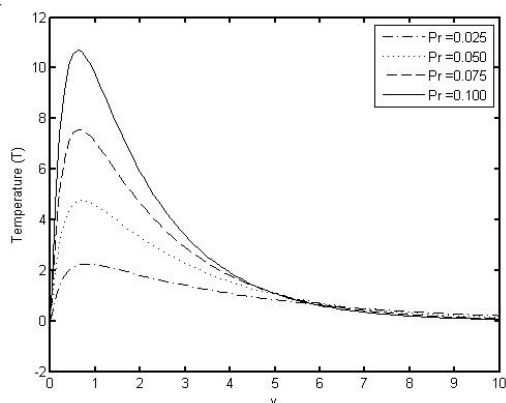


Figure 9. Effects of Prandtl number on temperature profiles. ($\epsilon=0.001, Sc=0.22, M=0.5, Gr=2, Gm=2, K=1, F=3$)

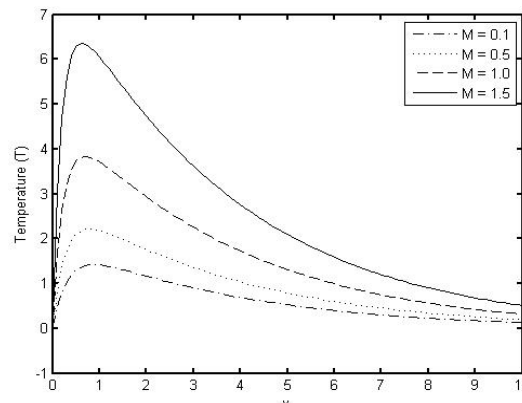


Figure 10. Effects of magnetic parameter on temperature profiles. ($\epsilon=0.001, Sc=0.60, Pr=0.025, Gr=2, Gm=2, K=1, F=3$)

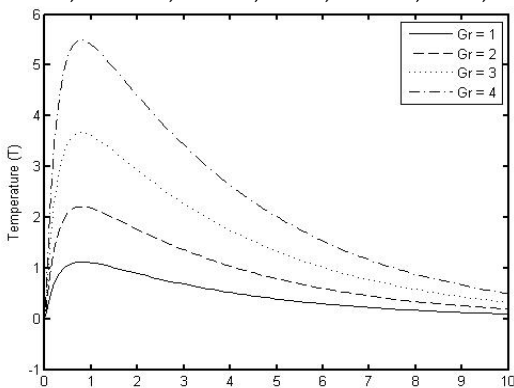


Figure 11. Effects of Grashof number on temperature profiles. ($\epsilon=0.001, Sc=0.60, Pr=0.025, M=0.5, Gm=2, K=1, F=3$)

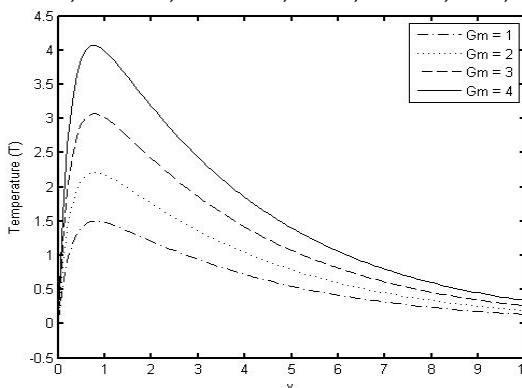


Figure 12. Effects of modified Grashof number on temperature profiles. ($\epsilon=0.001, Sc=0.60, Pr=0.025, M=0.5, Gr=2, K=1, F=3$)

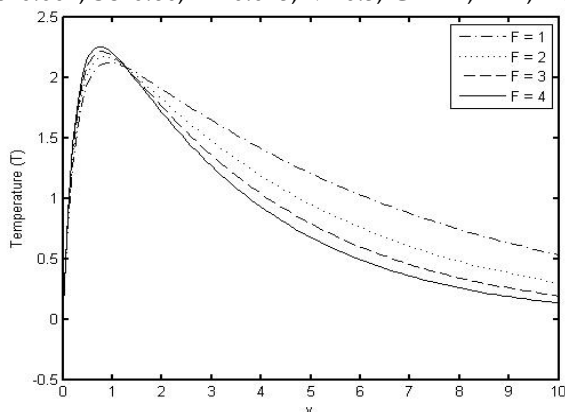


Figure 13. Effects of radiation parameter on temperature profiles. ($\epsilon=0.001, Sc=0.60, Pr=0.025, M=0.5, Gr=2, Gm=2, F=3$)

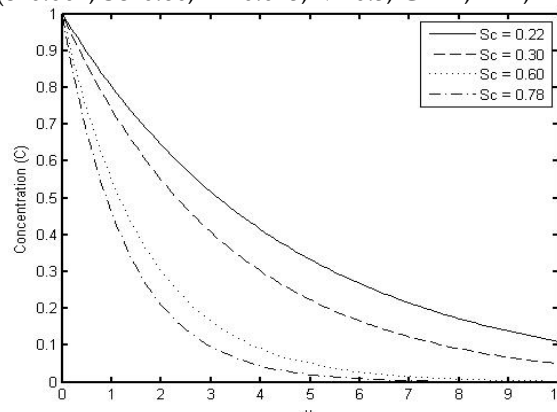


Figure 14. Effects of Schmidt number on concentration profiles. ($\epsilon=0.001, Pr=0.025, M=0.5, Gr=2, Gm=2, K=1, F=3$)

Figure 11 illustrates the effect of Grashof number on the temperature field. It is noticed that the Grashof number increases, the temperature decreases. The effect of modified Grashof number on the temperature field is illustrated in Figure 12. It is observed that as the modified Grashof number increases, the temperature increases. Figure 13 illustrates the effect of thermal radiation parameter on the temperature field. It is noticed that as the thermal radiation parameter increases, the temperature of the fluid medium increases. Figure 14 illustrates the effect of Schmidt number on the concentration field. It is noticed that as the Schmidt number increases, the concentration of the fluid medium decreases.

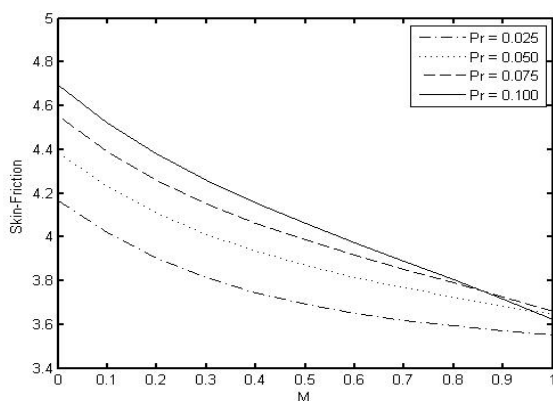


Figure 15. Effects of Prandtl number on skin-friction.

($\varepsilon=0.001$, $Sc=0.22$, $K=1$, $Gr=2$, $Gm=2$, $F=3$)

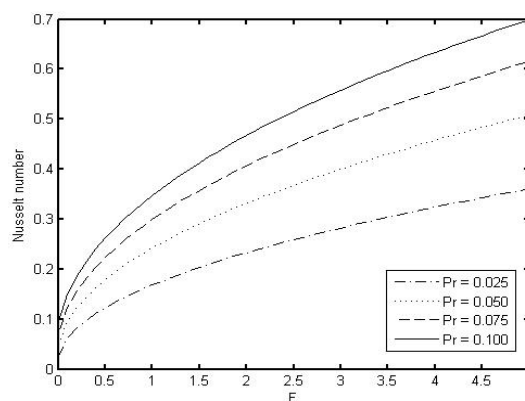


Figure 16. Effects of Prandtl number on the Nusselt number.

($\varepsilon=0.001$, $M=2$, $K=1$, $Gr=2$, $Gm=2$, $Sc=0.22$)

Figure 15 illustrates the effect of Prandtl number on the skin-friction of the fluid under consideration. As the Prandtl number increases the skin-friction is found to be increasing. Figure 16 illustrates the effect of the Prandtl number on the Nusselt number of the fluid under consideration. As the Prandtl number increases, the Nusselt number increases.

References

- [1.] J.A.Shercliff. A text book of Magnetohydrodynamics", Pergamon Press, London, 1965.
- [2.] V.C.A.Ferraro, C. Plumpton. An Introduction to Magneto Fluid Mechanics", Clarendon Press, Oxford, 1966.
- [3.] K.P.Crammer and S.L.Pai, "Magneto-fluid Dynamics for Engineers and Applied Physicist, Mc-Graw Hill book co., New york,1973.
- [4.] E.M.A.Elbashbeshy, "Heat and mass transfer along a vertical plate with variable surface temperature and concentration in the presence of the magnetic field", Int. Eng. Sc., 34,515-522,1997.
- [5.] M.A.Hossain, and D.A.S.Rees, "Combined heat and mass transfer in natural convection flow from a vertical wavy surface," Acta Mech., 136,133-141, 1999.
- [6.] Chein-Hsin-Chen, "Combined heat and mass transfer in MHD free convection from a vertical surface with Ohmic heating and viscous dissipation", Int. J. Eng. Science, 42,699-713, 2004.
- [7.] E.M.Aboeldahab and E.M.E.Elbarbary, "Hall current effect on Magnetohydro-dynamics free convection flow past a semi-infinite vertical plate with mass transfer", Int. J. Eng. Science, 39, 1641-1652, 2001.
- [8.] N.Datta and R.N.Jana, "Oscillatory Magnetohydrodynamic flow past a flat plate with hall effects", J.Phys.Soc.Japan,40, 1469-1475,1976.
- [9.] M.Acharya,G.C. Dash and L.P.Singh, "Hall effect with simultaneous thermal and mass diffusion on unsteady hydromagnetic flow near an accelerated vertical plate", Indian J.of Physics B,75B(1),168,2001.
- [10.] S.Biswal and P.K.Sahoo, "Hall effect on Oscillatory hydrodynamic free convective flow of a visco-elastic fluid past an infinite vertical porous flat plate with mass transfer", Proc.Nat. Acad.Sci., 69A, 46, 1994.
- [11.] M. A. Hossain, M. A. Alim and D. A. Rees, The effect of radiation in free convection from a porous vertical plate, Int. J. Heat and Mass transfer, 42, p. 131,(1999).
- [12.] Aboeldahab Emad, Radiation effect on heat transfer in an electrically conducting fluid at a stretching surface with uniform free stream, J. Phys. D., Appl. Phys. 33, p. 3180,(2000)
- [13.] A. Y. Ghaly and E. M. E. Elbarbary, Radiation effect on MHD free convection flow of a gas at a stretching surface with uniform free stream, J. Appl. Math. 2, p. 93, (2002)
- [14.] R. Muthukumarswamy and G. Kumar Senthil, Heat and Mass transfer effect on moving vertical plate in the presence of thermal radiation, Theoret. Appl. Mech. 31, pp. 35,(2004).
- [15.] M. A. Hossain, Viscous and Joule heating effects on MHD free convection flow with variable plate temperature, Int. J. Heat and Mass transfer, 35, p. 3485,(1992).
- [16.] Chien-Hsin-Chen, Combined heat and mass transfer in MHD free convection from a vertical surface with Ohmic heating and viscous dissipation, Int. J. Engineering Science, 42, p. 699,(2004).

- [17.] P. Ganesan and G. Palani, Numerical solution of unsteady MHD flow past a semi-infinite isothermal vertical plate, in: Proceedings of the 6th ISHMT/ASME Heat and Mass Transfer Conference and 17th National Heat and Mass Transfer Conference, January 5–7, 2004, Kalpakkam, India, pp. 184–187, 2004.
- [18.] P. Ganesan and G. Palani, Finite difference analysis of unsteady natural convection MHD flow past an inclined plate with variable surface heat and mass flux, *Int. J. Heat Mass Tran.*, 47, pp. 4449–4457, 2004.
- [19.] O. Aydin and A. Kaya, Radiation effect on MHD mixed convection flow about a permeable vertical plate, *Heat Mass Transfer*, 45, pp. 239–246, 2008.
- [20.] O. Aydin, and A. Kaya, MHD mixed convection of a viscous dissipating fluid about a permeable vertical flat plate, *Appl. Math. Model.*, 33(11), pp. 4086–4096, 2009.
- [21.] A. C. Cogley, W. G. Vincenty and S. E. Gilles, Differential approximation for radiation transfer in a non-gray near equilibrium, *AIAAJ*, 6, p. 551, (1968).



ANNALS of Faculty Engineering Hunedoara
– International Journal of Engineering



copyright © University Politehnica Timisoara, Faculty of Engineering Hunedoara,
5, Revolutiei, 331128, Hunedoara, ROMANIA

<http://annals.fih.upt.ro>